

# DW118ETC

## Soft Serve Freezer

Counter Top Single Dispenser with Hopper Cooling

### Features

Offer all popular soft serve from low or non-fat ice creams to custard, frozen yogurt, and sorbet. Offers two separate flavors and an equal combination of both in a twist. Temperature and current dual regulation, a revolutionary design in the industry, together with extremely quiet operation benefited from a frequency inverter.

### Freezing Cylinder

One, 2.1 quart (2 liter).

### Mix Hopper

One, 13 quart (12 liter). Hopper cooling feature is able to keep temperature of the mix at or below 41°F (5°C),

### Mix Low Alarm

The mix low, audible beep alerts users to add mix to the hoppers.

### Microprocessor Regulation

Regulates the entire refrigeration process and maintains consistent product viscosity, adjustable on the front panel by modifying maximum electric current and lowest temperature at which refrigeration process stops, thus producing optimal taste and texture

### Safety Protection

Shuts down for self protection when motor overload or compressor overheat occurs due to power surge or abnormal voltage from power supply; for additional protection, refrigeration process stops when temperature of the mix in the cylinder chamber drops below a critical value due to lack of mix or failure of electric current control.

### Production Capacity

20 quarts/hour (18 liters/hour) and higher



## Oceanpower America



Pembroke Pines, FL 33024

Telephone: 305-721-7823

Email: [info@email.oceanpower.com](mailto:info@email.oceanpower.com)

Website: <http://www.oceanpoweramerica.com>.



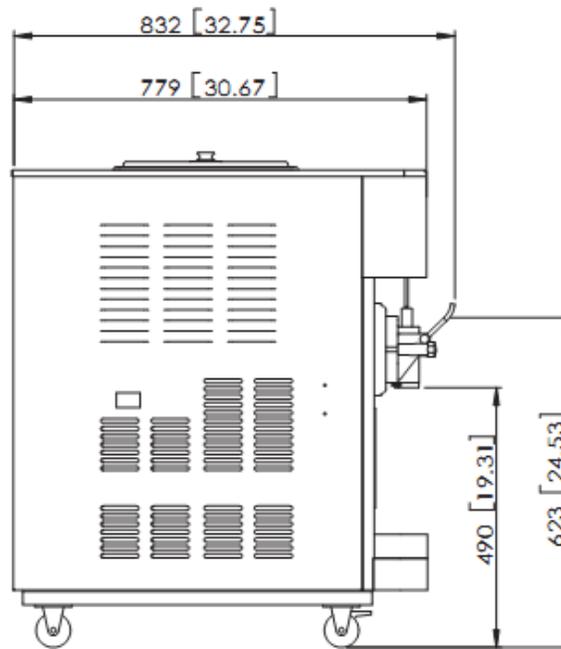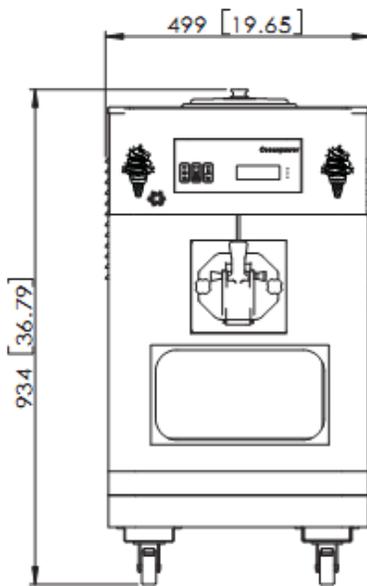

Weight	lbs.	kgs.
Net	262	119
Total	308	140

Dimensions	in.	mm.
Width	19.7	499
Depth	32.8	779
Height	36.8	934

Electrical	Maximum Fuze Size	Minimum Ampacity	Poles(P) Wires(W)
115/60/1	35	13	2P 3W
208-230/60/1	35	6	2P 3W
220-240/50/1	35	6	2P 3W

These specifications are subject to change without notice as further research and development efforts continuously improve the model.

## Specifications

### Electrical

One dedicated electrical connection is required. Check with local electrician for cord and receptacle specifications if 50 Hz Equipment is desired.

### Beater Motor

One 1 HP

### Refrigeration System

One, 3,700 BTU/hr compressor (nominal rating). R404.  
One, 430 BTU/hr compressor (nominal rating) for hopper cooling, R134A  
(Actual BTUs will vary based on application.)

### Air Cooled

Minimum Clearance: 6" (152 mm) on left, right, and rear.  
Minimum air clearances must be met to assure adequate air flow for optimum

### Options

- Cone Dispenser

## Oceanpower America

Pembroke Pines, FL 33024

Telephone: 305-721-7823

Email: [info@email.oceanpower.com](mailto:info@email.oceanpower.com)

Website: <http://www.oceanpoweramerica.com>.

