

DW132ETC

Soft Serve Freezer

Counter Top Twin Twist with Hopper Cooling

Features

Offers all popular soft serve from low or non-fat ice creams to custard, frozen yogurt, milkshake and sorbet. Offers two separate flavors and an equal combination of both in a twist. Viscosity control for optimal texture and taste. Temperature and viscosity dual regulation plus fast refrigeration and hopper cooling powered by a standalone compressor, first dispensing within ten minutes in well ventilated and air-conditioned environment.

Freezing Cylinder

Two, 2.1 quart (2 liter).

Mix Hopper

Two, 6.9 quart (6.5 liter). Hopper cooling feature is able to keep temperature of the mix at or below 41°F (5°C), powered by a separate compressor.

Mix Low Alarm

The mix low, audible beep alert users to add mix to the hoppers

Microprocessor Regulation

Regulates the entire refrigeration process and maintains product consistency, adjustable by modifying product viscosity and temperature cutout value.

Overnight Mode Operation

Overnight mode operation refrigerates mix in liquid form in the cylinder while preserving freshness and texture without compromising quality of the product.

Overheat and Over-freeze Protection

Shuts down for self protection when motor overload or compressor overheat occurs due to power surge or abnormal voltage from power supply. Refrigeration process stops when temperature of the mix in the cylinder drops below a critical value.

Quiet Operation

Industry-innovative use of three phase motor and phase converter greatly lowers operating noise level.



Oceanpower America



Fort Worth, TX 76120

Telephone: 305-721-7823

Email: info@email.oceanpower.com

Website: <http://www.oceanpoweramerica.com>.



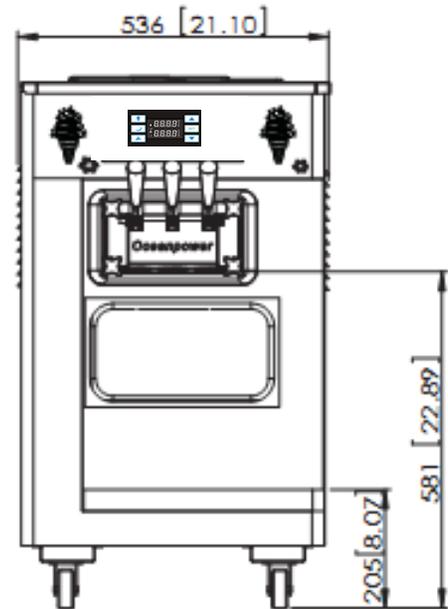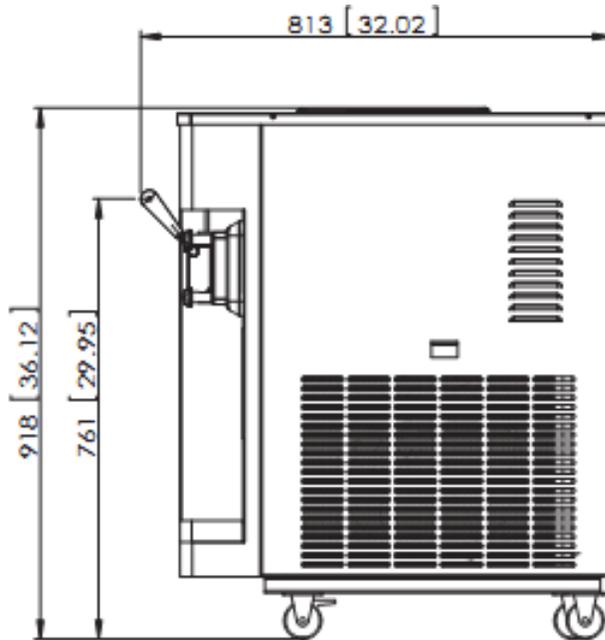

| Weight | lbs. | kgs. |
|------------|------|------|
| Net | 326 | 148 |
| Total | 374 | 170 |
| Dimensions | in. | mm. |
| Width | 21.1 | 536 |
| Depth | 32.0 | 813 |
| Height | 36.1 | 918 |

| Electrical | Maximum Fuze Size | Minimum Ampacity | Poles(P) Wires(W) |
|--------------|-------------------|------------------|-------------------|
| 208-230/60/1 | 35 | 15 | 2P 3W |
| 220-240/50/1 | 35 | 15 | 2P 3W |

These specifications are subject to change without notice as further research and development efforts continuously improve the model.

Specifications

Electrical

One dedicated electrical connection is required. Check with local electrician for cord and receptacle specifications if 50 Hz Equipment is desired.

Beater Motor

One 1.5 HP

Refrigeration System

One, 4,600 BTU/hr Embraco or Tecumseh compressor (nominal rating). R404a.

Hopper Cooling, One, 430 BTU/hr. R134a

Actual BTUs will vary based on application.

Air Cooled

Minimum Clearance: 6" (152 mm) on left, right, and rear.

Minimum air clearances must be met to assure adequate air flow for optimum

Options

- Cone Dispenser

Oceanpower America

Fort Worth, TX 76120

Telephone: 305-721-7823

Email: info@email.oceanpower.com

Website: <http://www.oceanpoweramerica.com>.

Distributed by