



OP238EC

Soft Serve Freezer

Floor Standing Twin Twist with Hopper Cooling

Features

Meet all soft serve needs from low or non-fat ice creams, custard, frozen yogurt, and sorbet. Offers two separate flavors and an equal combination of both in a twist at the center.

Freezing Cylinder

Two, 2.1 quart (2 liter).

Mix Hopper

Two, 12.7 quart (12 liter). Separate hopper cooling feature is able to keep temperature of the mix at or below 41°F (5°C).

Mix Low Alarm

The mix low light and audible beep alert users to add mix to the hoppers.

Microprocessor Regulation

Regulates the entire refrigeration process and maintains consistent product viscosity, adjustable by pressing 'up' and 'down' arrows on the front panel, and thus optimal taste and quality.

Temperature-Current Mode Operation

The new temperature-current-timing control system is able to regulate product freezing session with an added layer of low temperature protection against possible cylinder frozen problem.

Safety Protection

Shuts down for self protection when motor overload or compressor overheat occurs due to power surge or abnormal voltage from power supply. Refrigeration process stops when temperature of the mix in the cylinder chamber drops below a critical value due to lack of mix or failure of electric current control.

Oceanpower America


Pembroke Pines, FL 33024

Telephone: 305-721-7823

Email: info@email.oceanpower.com

Website: <http://www.oceanpoweramerica.com>.



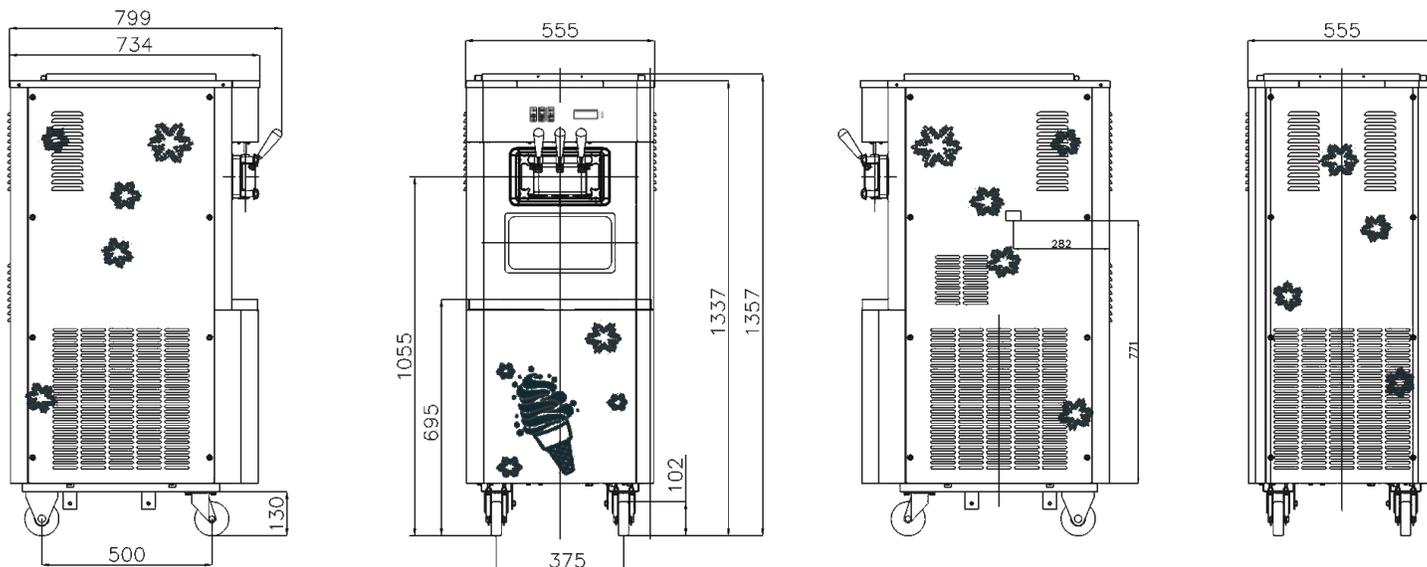

Weight	lbs.	kgs.	
Net	363	165	
Total	528	240	
Dimensions	in.	mm.	
Width	21.9	555	
Depth	28.9	735	
Height	53.4	1,357	
Electrical	Maximum Fuze Size	Minimum Ampacity	Poles(P) Wires(W)
115/60/1	35	25	2P 3W

These specifications are subject to change without notice as further research and development efforts continuously improve the model.

Specifications

Electrical

One dedicated electrical connection is required. Check with local electrician for cord and receptacle specifications if 50 Hz Equipment is desired.

Beater Motor

One 1.5 HP

Refrigeration System

One, 3,700 BTU/hr Embraco compressor (nominal rating). R404a. Hopper Cooling, One, 450 BTU/hr. R134a. (Actual BTUs will vary based on application.)

Air Cooled

Minimum Clearance: 6" (152 mm) on left, right, and rear. Minimum air clearances must be met to assure adequate air flow for optimum

Options

- Cone Dispenser

Oceanpower America

Pembroke Pines, FL 33024

Telephone: 305-721-7823

Email: info@email.oceanpower.com

Website: <http://www.oceanpoweramerica.com>.

